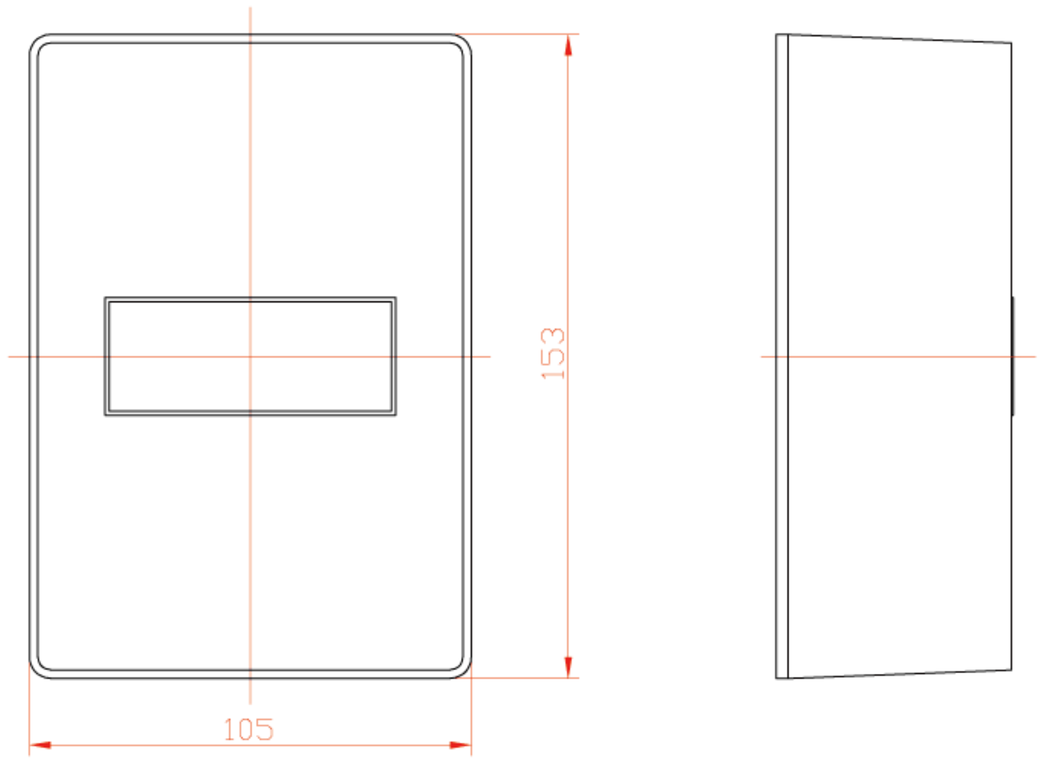

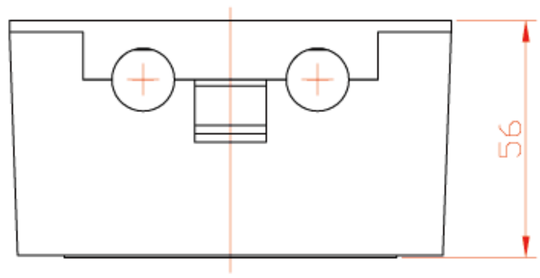

技术要求

1、表面
2、未注圆角为工艺圆角，
未注公差为GB/T1804-m。

1. Environment condition: -5-40 degree Celsius ； Relative humidity <85% (+30 degree Celsius)； Atmospheric pressure: 70-106KPa
2. Pulling-out force: tin bronze and silver plating (20-40 uinch), pulling-out force not less than 25N ；
3. The performance of anti-burn: anti-burn ABS（UL94V-0）； Combustibility achieved GB/T 5169.7-1985 standard ；
4. Insulated resistance: under standard atmospheric pressure ， Insulated resistance no less than 1,000M ohm between the two disjunct connections ；
5. Intermediate resistance between the reed terminators: no more than 7m ohm between intermediate reed under the standard examination condition
6. Dielectric strength: according to industry standard
7. Life: durability 200 cycles

ENREGISTER OF BORROW									
TRACER									
PROOFREADER									
SERIAL NUMBER OF OLD BASE MAP									
SERIAL NUMBER OF BASE MAP						Indoor distribution box (30 pairs)			XL-026C
SIGNATURE	SIGNE	QUANTITY OF LOCALITY	DOCUMENT SERIAL NUMBER	SIGNATURE	DATE				
	DEVISER		NORMALIZER			DRAWING MARK SYMBOL	QUANTITY	WEIGHT	SCALE
	PROOFREADER		RATIFIER						1:2
DATE	ASSESSOR								ANSHI Cixi Anshi communication Equipment Co.,Ltd
	TECHNOLOGIST		DATE			PAGE NUMBER OF ALL		PAGE HEADER	