


Key Specifications/Special Features

- 1.Operation temperature:-20 ℃ to 60 ℃, Relative humidity: 85%(30℃), Air pressure: 70-106Kpa.
- 2.With Cat5e keystone modules used for 19" cabinet ,Complete metalation and reed construction, modularization design ;
- 3.IDC: phosphor bronze and silver plating (20-50uinch), suitable diameter 0.4-0.6mm, durability 200 cycles ;
- 4.Contact pin: phosphor bronze and gold plating (20-50uinch), mating durability not less than 750 cycles ;
- 5.Anti-bum performance: plastic part made from PPO and PC or PBT and ABS, meeting the international standard ;
- 6.Intermediate resistance: no more than 20m ohm in normal atmosphere pressure (not including bulk resistor) ;
- 7.Insulated resistance: no less than 1,000M ohm in normal atmosphere pressure ;
- 8.The intensity of anti-currency: DC 1,000V (AC,700V), No puncture and flash-over phenomenon in one minute. Accord with industry standard ;
- 9.Backwave loss: ≥34dB(1≤f<100MHz)
- 10.Minimum near end cross talk loss 100MHz: ≥43dB(100MHz); Minimum far end cross talk loss 100MHz: ≥35.3dB(100MHz)
- 11.Label:clear label to ensure easy to manage ;
- 12.Type:unshielded
- 13.Standard: designed by international ISO/IEC11801 and TIA/EIA568 ;

Electrical schematic or Electrical schematic
T568A or T568B

connector universal wiring labels

T568A	T568B	connecting block	8 position modular jack
white/green	white/orange	1	J1
green	orange	2	1 PR
white/orange	white/green	3	2 PR
blue	blue	4	3 PR
white/blue	white/blue	5	4 PR
orange	green	6	5 PR
white/brown	white/brown	7	6 PR
brown	brown	8	7 PR
			8 PR
T568A	T568B	48	J48
white/green	white/orange	1	1 PR
green	orange	2	2 PR
white/orange	white/green	3	3 PR
blue	blue	4	4 PR
white/blue	white/blue	5	5 PR
orange	green	6	6 PR
white/brown	white/brown	7	7 PR
brown	brown	8	8 PR

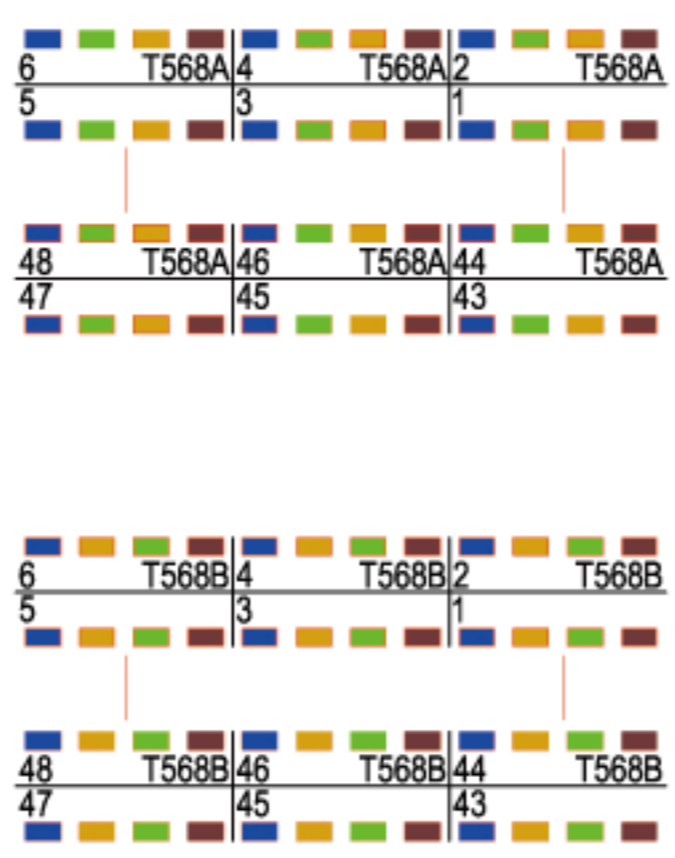

				48 ports patch panel				XL-4017B	
SIGNATURE	DEWITTY OF QUALITY	DOCUMENT SERIAL NUMBER	SIGNATURE	DATE	DRAWING MARK SYMBOL	QUANTITY	WEIGHT	SCALE	ANSHI Cixi Anshi communication Equipment Co.,Ltd
DEVISER		NORMALIZER						1:1.5	
PROOFREADER		RATIFIER							
ASSESSOR		DATE			PAGE NUMBER OF ALL	PAGE HEADER			

ENREGISTER OF BORROW
TRACER
PROOFREADER
SERIAL NUMBER OF OLD BASE MAP
SERIAL NUMBER OF BASE MAP
SIGNATURE
DATE