

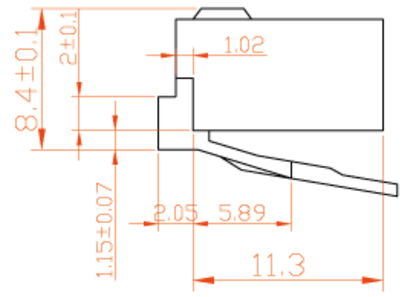

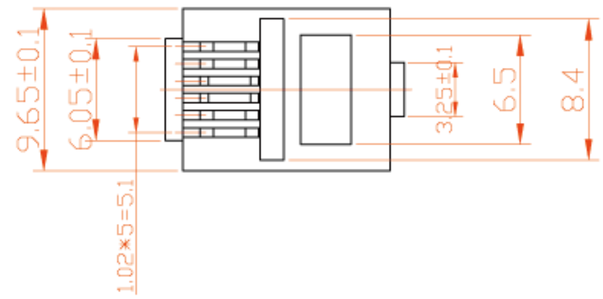

1、Working temperature: -25℃-55℃.
2、Electrical:Current rating:1.5Amps; Voltage rating;125VAC; Insulation resistance:≥100MΩ;
Contact resistance≤39mΩ;Withstanding voltage:1000V RMS 50（60）Hz AC 1 Min
3、Mechanical:Retention strength:7.7kg between jack and plug; Durability:200mating cycles mimi.
4、Material:Housing:P.C（UL94V-0或UL94V-2);Shieldinjg： 0.25mm thickness copper alloy with tin plated。
5、Contact:1.phosphor bronze, hard gold plated over nickel, Gold plating:（3、6、15、30、50u inch）;
6、Types： Have 6P6C、6P4C、6P2C

ENREGISTER OF BORROW

TRACER

PROOFREADER

SERIAL NUMBER OF OLD BASE MAP

SERIAL NUMBER OF BASE MAP

SIGNATURE

DATE

SIGNE	QUANTITY OF LOCALITY	DOCUMENT SERIAL NUMBER	SIGNATURE	DATE
DEVISER		NORMALIZER		
PROOFREADER		RATIFIER		
ASSESSOR				
TECHNOLOGIST		DATE		

Modular plug

DRAWING MARK SYMBOL			QUANTITY	WEIGHT	SCALE
					2:1

PAGE NUMBER OF ALL | PAGE HEADER

XL-4021

ANSHI Cixi Anshi communication Equipment Co.,Ltd