
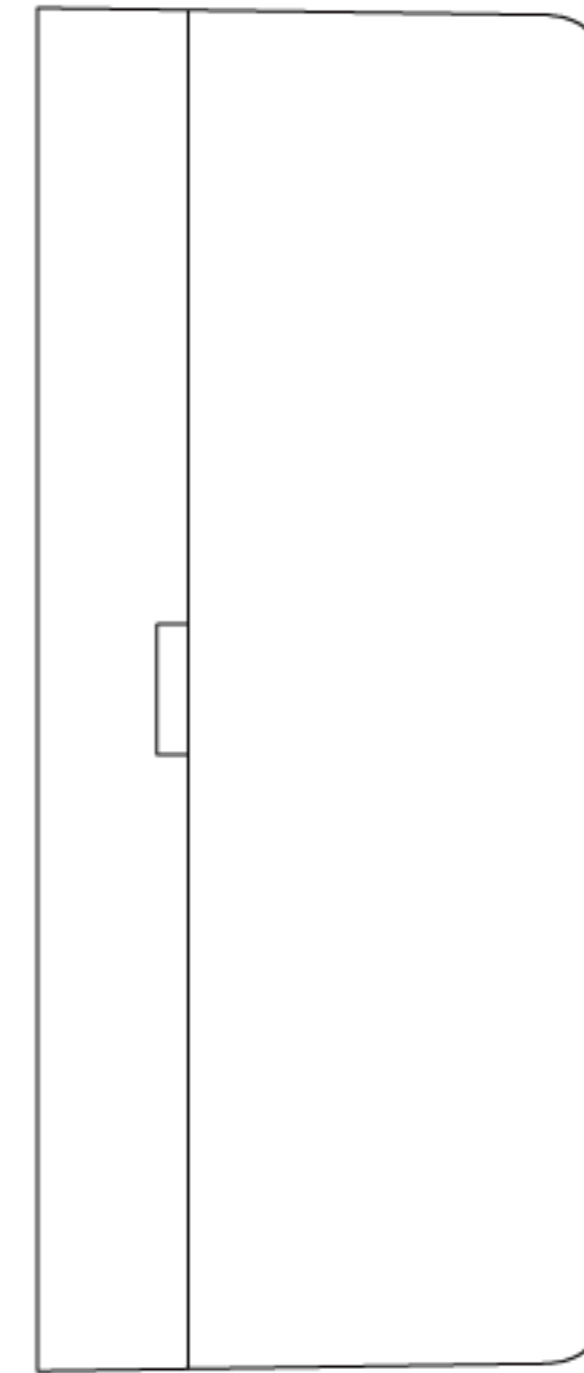
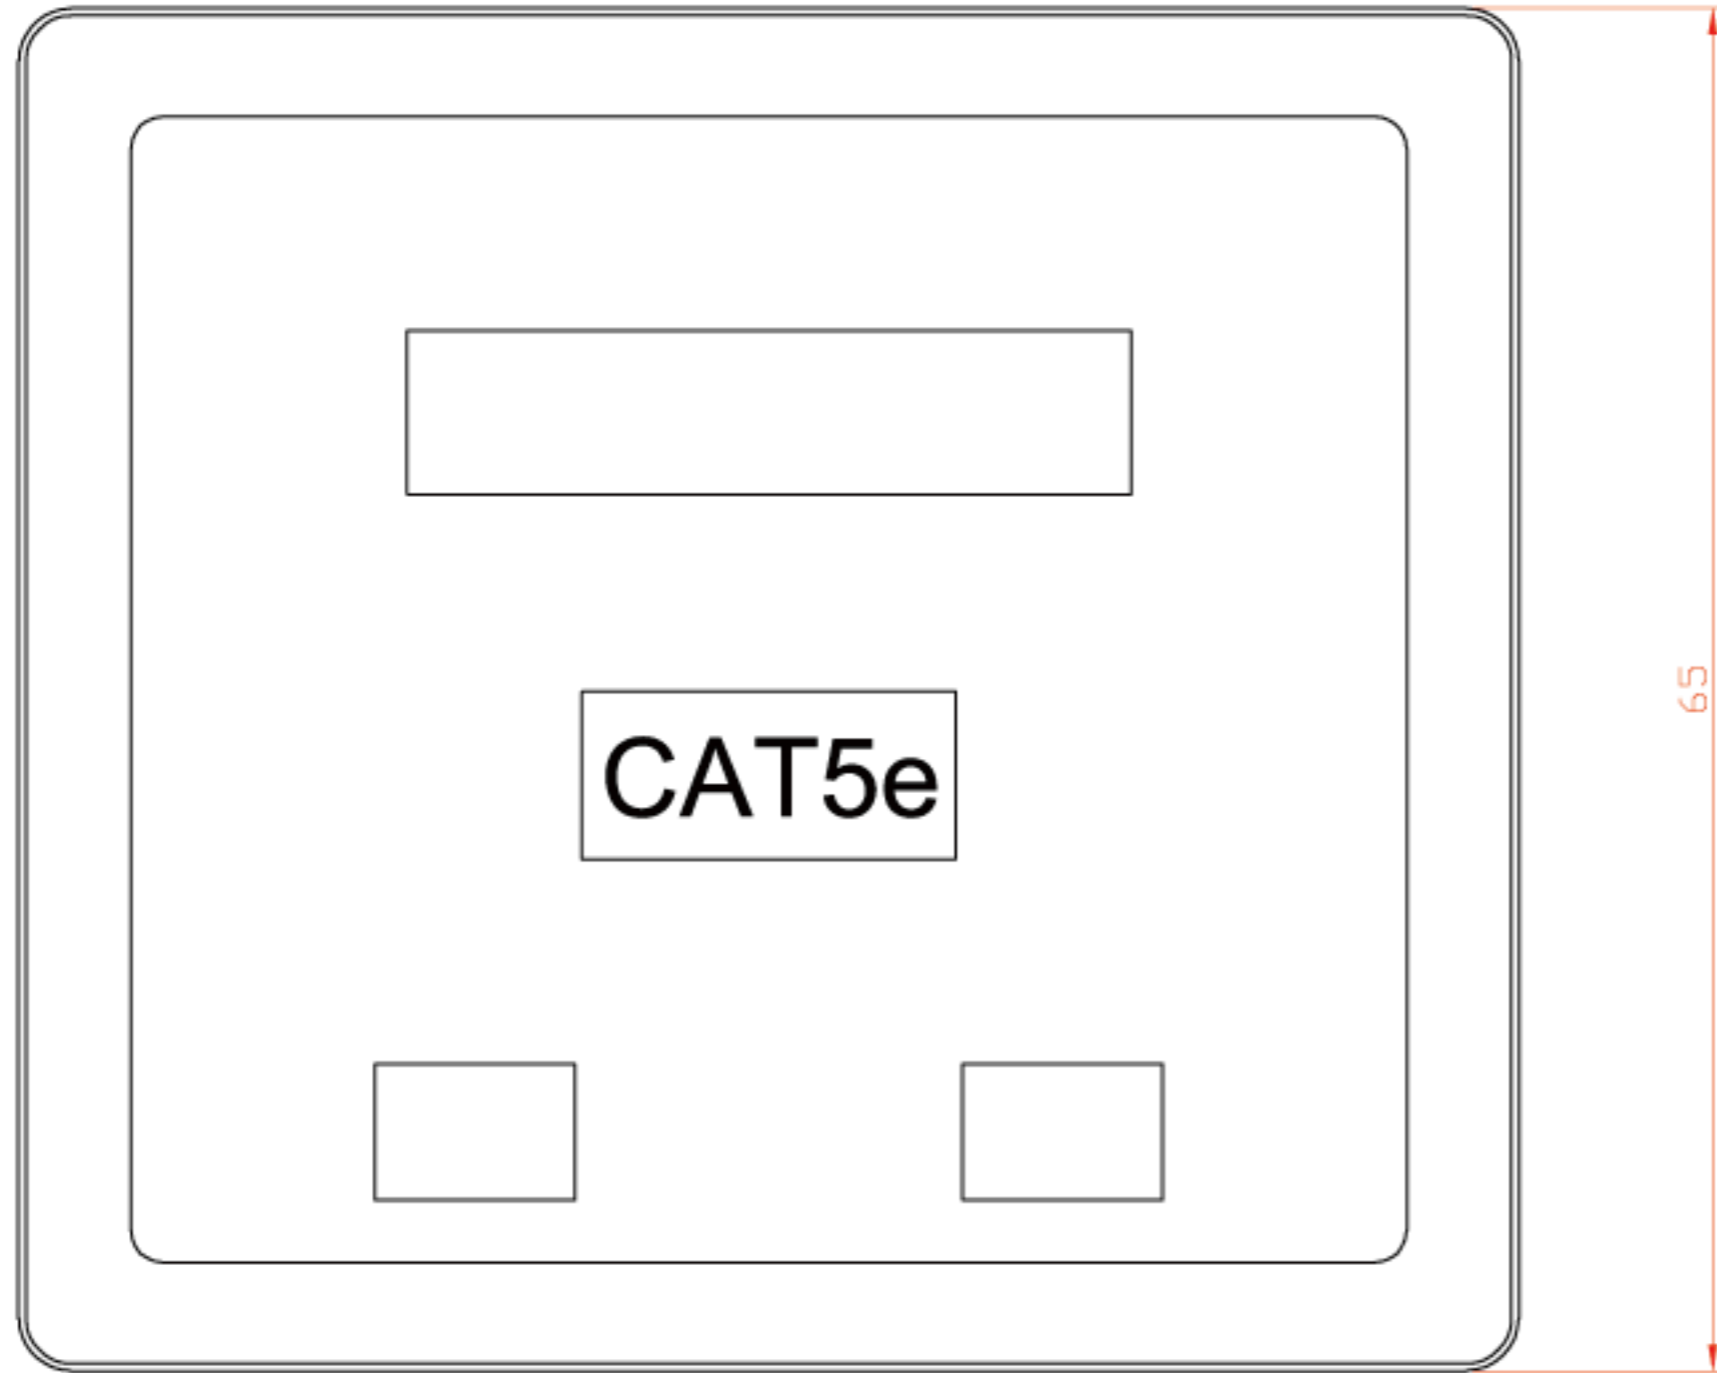


Specifications

- 1、 Operation temperature: -40℃ to 60℃,Relative humidity: ≤85% (30℃) Air pressure: 70~106Kpa ;
- 2、 Insertion force: 2contacts:350g;4contacts:500g;6contacts:750g;8contacts:900g;
- 3、 IDC: phosphor bronze and silver plating (20~50uinch), suitable diameter 0.4-0.6mm, durability 200 cycles
- 4、 Contact pin: phosphor bronze and gold plating (20~50uinch), mating durability not less than 750 cycles
- 5、 Anti-burn performance: plastic made from ABS and PC,UL94V-0, meeting the international standard
- 6、 Current rating:1.5AMPS; Voltage rating:125VAC;
- 7、 Intermediate resistance: no more than 20m ohm in normal atmosphere pressure (not including bulk resistor)
- 8、 Insulated resistance: no less than 1,000M ohm in normal atmosphere pressure
- 9、 Intensity of anti-currency: DC 1,000V (AC,700V), no puncture and flash-over phenomenon in one minute
- 10、 Retention strength:7.7kg between jack and plug;
- 11、 Label: clear label to ensure easy to management
- 12、 Standard: designed by international ISO/IEC11801 and TIA/EIA568

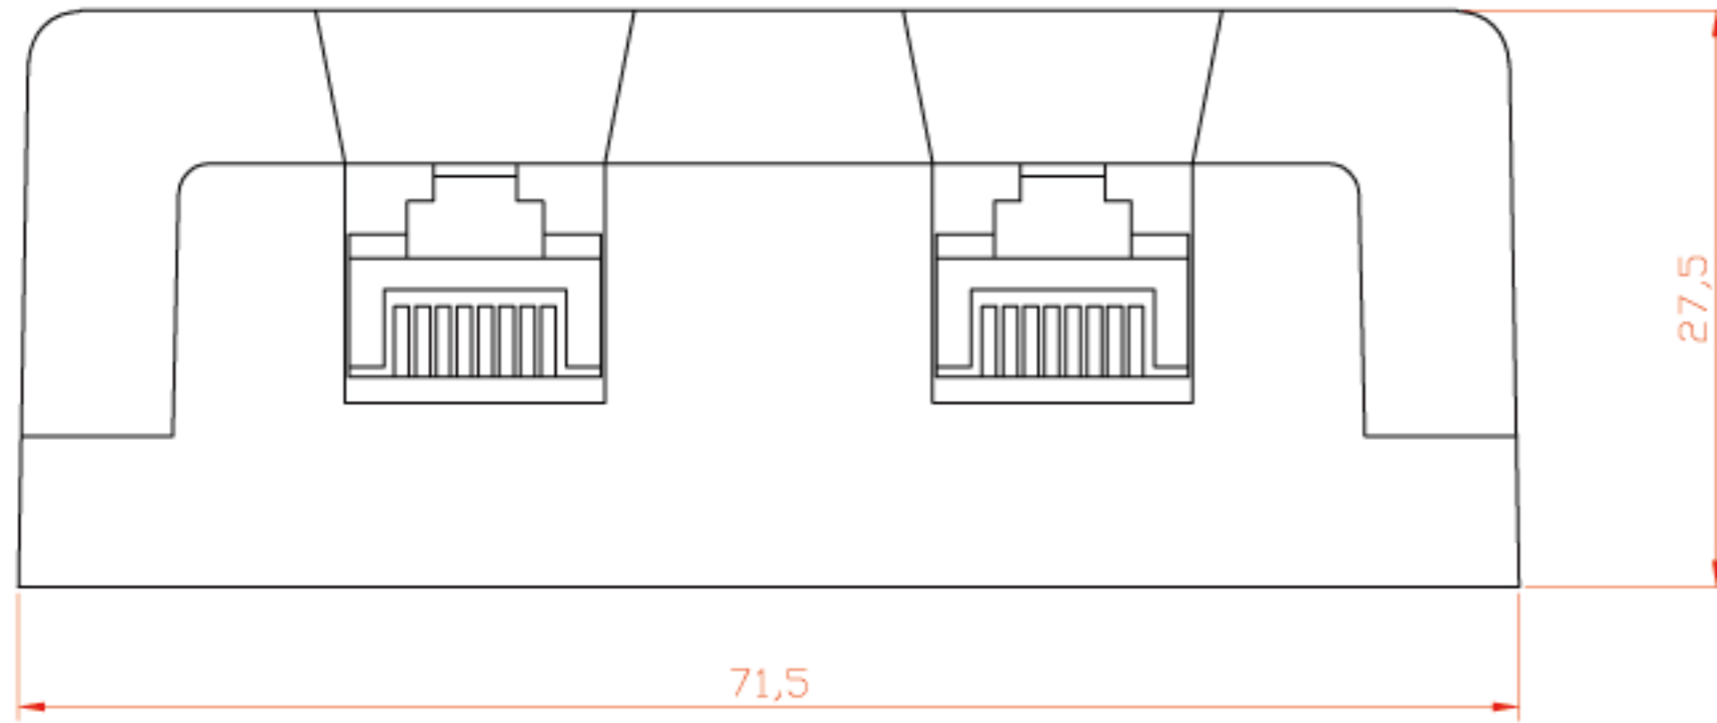

借通用件登记
描 图
描 校
旧底图总号
底图总号
签 字
日 期

| | | | | | | | | | | |
|----|----|-------|-----|----|-------------------------------|-----|----|-------|---------------|--|
| | | | | | 桌上盒示意图 (双口) | | | | | |
| | | | | | Information box (double-port) | | | | | |
| 标记 | 处数 | 更改文件号 | 签 字 | 日期 | | | | | XL-4016B | |
| 设计 | | | 标准化 | | 图样标记 | 数量 | 重量 | 比例 | 慈溪市安士通信设备有限公司 | |
| 校对 | | | 审定 | | | | | 1.5:1 | | |
| 审核 | | | | | | | | | | |
| 工艺 | | | 日期 | | 共 页 | 第 页 | | | | |