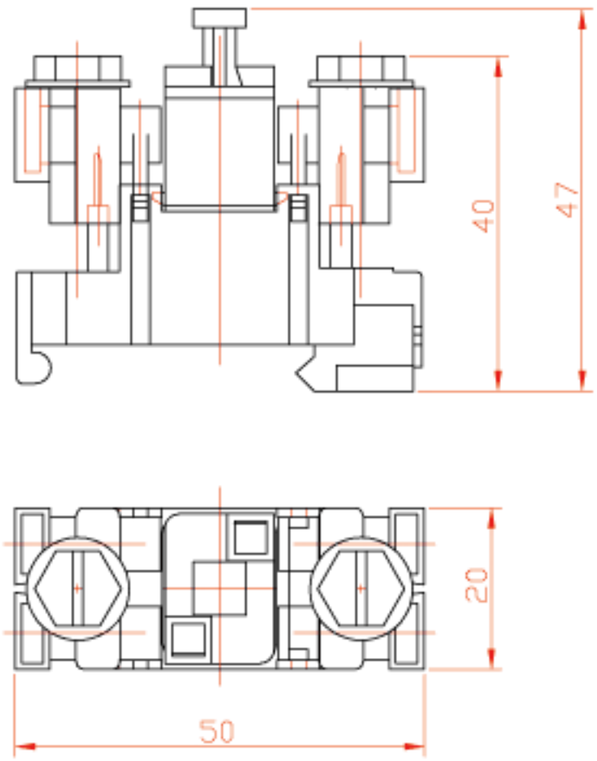

Specifications（Contact characteristics）

1、Drop wire connector: Gauge range: 0.4 to 1.2 mm diameter; Insulation diameter: 4 mm maximum diameter
2、Pair connector：Gauge range: 0.4 to 1.2 mm diameter； Insulation diameter：4 mm maximum diameter
3、Mechanical characteristics：
Pair/drop wire housing screw: Special passivated direct + lacquered Zamac alloy.
Drop wire housing body: Transparent polycarbonate
Body: Flame retardant (UL94)； fiber-glass reinforced; polycarbonate
Plug-in module body: Flame retardant (UL94)； fiber-glass reinforced； polycarbonate
Insertion contacts: Tinned phosphor bronze; Ground contacts: Cu-Zn-Ni-Ag alloy
Continuity contacts: Tinned hard brass; Lower sealant: Polymeric resin
Upper cable sealant: Silicone fluid; Pair/drop wire bearing cover: Polycarbonate
Plug-in module sealant: Gel; "O" ring: EPDM
Cable/drop wire membrane: Thermoplastic rubber; Box base and cover: Polycarbonate RAL 7035
Earthing assembly: Stainless steel; Grommet: EPDM
Plug-in module configuration： Continuity；

ENREGISTER OF BORROW

TRACER

PROOFREADER

SERIAL NUMBER OF OLD BASE MAP

SERIAL NUMBER OF BASE MAP

SIGNATURE

DATE

					STB module(without over-voltage protector)			AS-STB
SIGNE	IDENTITY OF LOCALITY	DOCUMENT SERIAL NUMBER	SIGNATURE	DATE				
DEVISER		NORMALIZER			DRAWING MARK SYMBOL	QUANTITY	WEIGHT	SCALE
PROOFREADER		RATIFIER						1:1
ASSESSOR								ANSHI Cixi Anshi communication Equipment Co.,Ltd
TECHNOLOGIST		DATE			PAGE NUMBER OF ALL	PAGE HEADER		